


QUALIFIED TO SPECIFICATION EI 1581 7TH EDITION, CATEGORY C, TYPE S-M

The standardized filter/water separator FW24-H-T is designed to be compliant with procedural guidelines, applicable legal regulations and requirements of the pressure vessel regulation AD2000. The filter vessels incorporate threaded base coalescer elements and reusable separator elements.

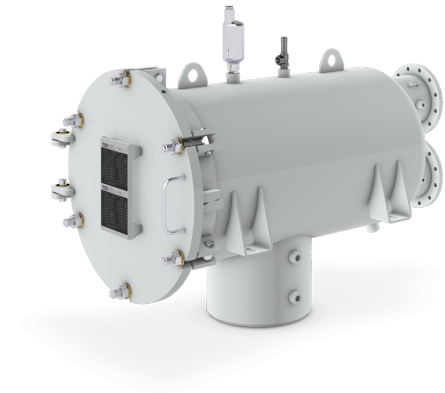

APPLICATION AREA

- Designed for hydrant dispensers and refuelers

TECHNICAL DATA

- Design and construction: EI 1596 3rd Edition
- Design pressure: Designed according to EN 12312-05
- Flow rate: Up to 4180 lpm (1104 USgpm)

STANDARD DESIGN

- Material: Stainless steel
- Interior: Stainless steel
- Cover seal: NBR (Buna-N) or FKM (Viton)
- Anti-vibration grid: According to EI 1596

ORDER REFERENCE

Vessel	Coalescer Elements		Separator Elements		Flow Rates	
Model No.	Model	Quantity	Model	Quantity	lpm	USgpm
FW24-H-T-6-770-10	P2.1-770-6	6	60.4C4-754-DV	1	660	174
FW24-H-T-12-770-10	P2.1-770-6	12	60.4C4-754-DV	2	1320	348
FW24-H-T-19-770-10	P2.1-770-6	19	60.4C4-754-DV	3	2090	552
FW24-H-T-25-770-10	P2.1-770-6	25	60.4C4-754-DV	4	2750	726
FW24-H-T-31-770-10	P2.1-770-6	31	60.4C4-754-DV	5	3410	900
FW24-H-T-38-770-10	P2.1-770-6	38	60.4C4-754-DV	6	4180	1104

FW24-H-T-Baureihe

30200 Scharnhorst
Strasse 7 B
D-35260 Stadallendorf
Germany
sefiso@sefiso.com

Stütztafel / LIST OF NOZZLES





Stütztafel NO	Nennweite NOMINAL SIZE	Fonchenort TYPE OF FLANGES	Benennung NAME
1	90°m ACC. TABLE	90°m ACC. TABLE	Eintritt INLET
2	90°m ACC. TABLE	90°m ACC. TABLE	Austritt OUTLET
3	G 3/4"	Gewinde / THREAD	Entwässerung DRAIN
4/5 (1)	G 3/4"	Mulle / SOCKET	Reifenentlastung CHAMBER DRAIN
6	G 3/4"	Mulle / SOCKET	Auto. Entlüftung AUTOM. AIR ELIMINATOR
7	G 1/2"	Mulle / SOCKET	Überdruckventil PRESSURE RELIEF VALVE
8/9	G 1/4"	Mulle / SOCKET	Diff. Druck Messung DIFF. PRESSURE GAUGE
10/11	G 1/4"	Mulle / SOCKET	Probiermündung SAMPLING PROBE
12/13 (2)	G 1/2"	Mulle / SOCKET	Wasserstandsange- ZEIGER WATER LEVEL GAUGE
14 (3)	G 1"	Mulle / SOCKET	Schwingen- ZEIGER LIQUID LEVEL GAUGE

(1) FW24-H-T-6-770-10 G1/2"
(2) Nicht bei / NOT WITH FW24-H-T-6-770-10
(3) Nicht bei / NOT WITH FW24-H-T-6-770-10

- Ausbaulänge der Baureihe ca. 0,8 Meter!
- Einbaulänge der Baureihe ca. 0,5 Meter!
- Geeignete Maßabweichungen vorbehalten!
- SLIGHT DEVIATIONS RESERVE!

Technische Daten / TECHNICAL DATA

Berechnung / Herstellung / DESIGN CODE	AD-2000
Max. zul. Betriebsdruck (PSI) / MAWP (PSI)	10 bar
Prodruck / TEST PRESSURE	15 bar
Prodruck-Eintrittskammer / TEST PRESSURE INLET CHAMBER	8 bar
Zul. Betriebstemp. min/max (°F) / TEMPERATURE MIN/MAX (°F)	-40°C / +150°C
Medium / MEDIUM	Jet Fuel
Kategorie / CATEGORY	I
Approve / APPROVAL	DGRL 2014/68/EU

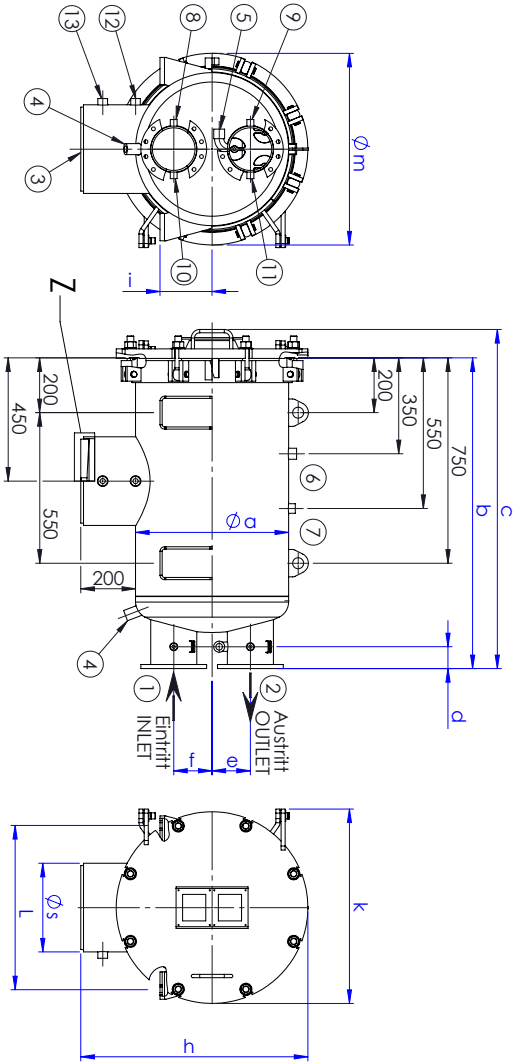

FW24-H-T-Baureihe - PN10

Modell	Art.Nr.	Separator	Coalescer	Max. Q	Volume	Weight	Inlet / Outlet DN	Øa	b	c	d	e	f	h	i	k	L	Øs	Øm
FW24-H-T-6-770-10	3014077	60.4CA-754-DV	1	P.2.1-770-7	660	55	DN 50 TW	273	1067	1150	75	80	80	498	147	441	300	168.3	410
FW24-H-T-12-770-10	3013622	60.4CA-754-DV	2	P.2.1-770-7	1320	97	DN 80 TW	366	1092	1190	75	80	90	628	140	590	400	273	500
FW24-H-T-18-770-10	3013621	60.4CA-754-DV	3	P.2.1-770-7	1980	160	DN100 TW	467	1112	1215	75	110	100	728	160	665	500	323.9	600
FW24-H-T-25-770-10	3013620	60.4CA-754-DV	4	P.2.1-770-7	2750	200	DN150 TW	508	1145	1248	80	125	125	781	170	710	550	323.9	660
FW24-H-T-31-770-10	3013619	60.4CA-754-DV	5	P.2.1-770-7	3410	240	DN150 TW	559	1135	1244	80	140	140	832	190	720	600	323.9	700
FW24-H-T-38-770-10	3013618	60.4CA-754-DV	6	P.2.1-770-7	4180	286	DN150 TW	610	1150	1259	80	165	165	883	190	775	650	323.9	750

07/2025